



CONCRETE SEALING PLUG

www.bannan.nz



Insitu-Concrete sealing options

Concrete sealing plugs have various options to seal tie-rod holes created, depending on colour and finish. The sealing method should be agreed upon during early stages to ensure correct installation and methodology is followed.

Finish & Colour options




Colour options

Any finish and colour can be achieved to match your instu concrete. Enquire to find out more.




Dimensions


Concrete sealing plug is made to suit Ramset 28mm conduit cone.

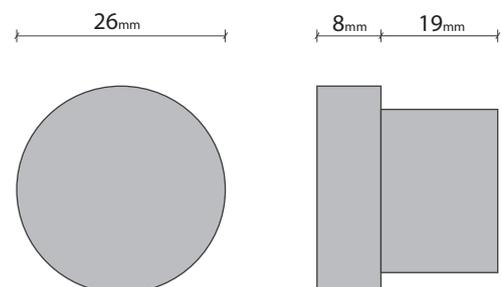


Install Procedure

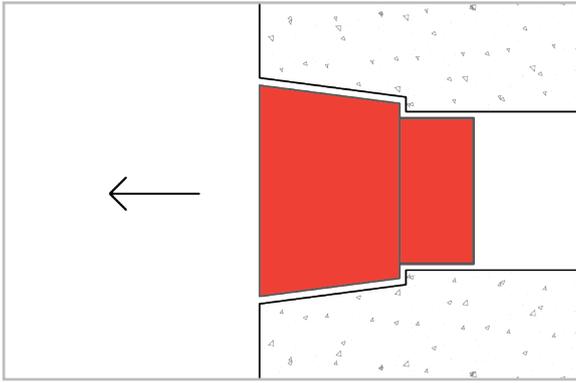


1. Remove plastic conduit cone to prepare to seal tie-rod hole

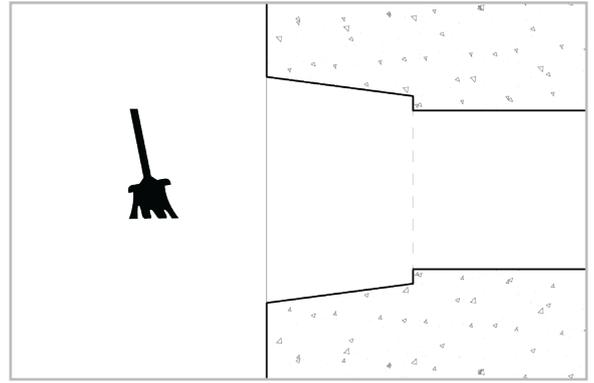


2. Clean any debris from the hole

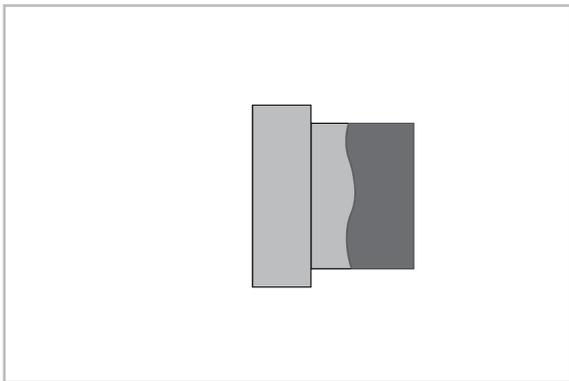

3. Prime the Concrete sealing plug with Sika Primer-3 or an equivalent primer.

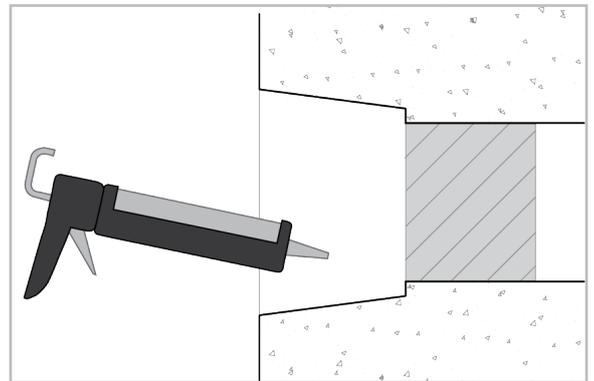

4. Use adequate amount of silicone to create a weather-tight seal behind the plug

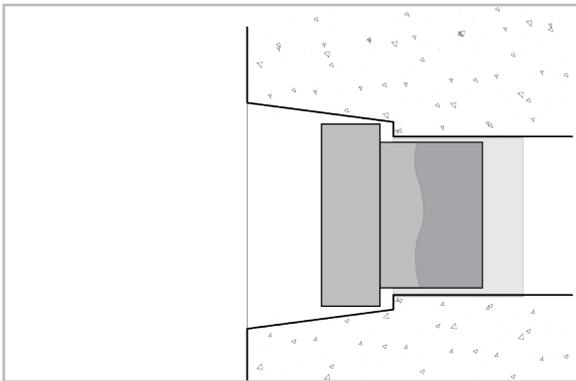

5. Place primed concrete sealing plug into the hole. Ensure the plug is fitted correctly.



Finished concrete sealing plug, installed.

Contact us...

Enquire now to find the right product to suit your next project.



Concrete Sealing Plug Brochure

2024

(+64) 27 549 8284

www.bannan.nz

blake@bannan.nz